



Welcome to a Ventless New World.

(218) 727.1181 • (800) 884.8635 • info@fjsdist.com • www.fjsdist.com

Bosch 24" Washer WAT28400UC



(WAT28400UC)
White

Key Features

- Large Capacity on Compact Footprint
- 15 Wash Cycles plus 6 Selectable Options
- Large LED Display with Remaining Time
- Unique Raindrop Stainless Steel Drum
- AntiVibration Technology for Second Floors Installation
- Washer plugs into Bosch 240V Dryer. Space saving and Flexible Installation.

General Properties

Tub Material	Stainless steel
Maximum spin speed (rpm)	1,200
Internal Water Heater	Yes
Stackability	Yes

Efficiency

Energy consumption (kWh/yr)	136
Water Consumption (gal/y)	3890

Wash Cycles & Options

Number of Options	6
-------------------	---

Capacity

Capacity (cu. ft.)	2.2
Load Capacity	16 bath towels

Technical Details

Watts (W)	2300
Current (A)	12
Volts (V)	208-240
Frequency (Hz)	60
Plug type	NEMA 6-15 (3 Prong)
Power cord included	Yes
Power cord length (in)	61 (Full Length)
Drain hose length (in)	57 (Full Length)
Inlet hose length (in)	47 (Full Length)

Dimensions & Weight

Overall appliance dimensions (HxWxD)(in)	33 1/4 x 23 1/2 x 25
Net weight (lbs)	170
Minimum Stack Height (in)	67

Bosch 24" Condensation Dryer WTG86400UC



(WTG8600UC)
White

Key Features

- Ventless Drying Required No Ducting
- Large Capacity on Compact Footprint
- 15 Drying Cycles and 6 Selectable Options
- LED Display with Remaining Time
- Washer plugs into Bosch 240V Dryer. Space saving and Flexible Installation.

General Properties

Dryer Type	Condensing
Tub Material	Galvalume
Stackability	Yes

Dryer Cycles & Options

Number of Cycles	15
Number of Options	6

Capacity

Capacity (cu. ft.)	4
Load Capacity	16 bath towels

Technical Details

Watts (W)	2,800
Current (A)	13
Volts (V)	208/220-240
Frequency (Hz)	60
Plug type	NEMA 14-30 (4 Prong)
Power cord included	Yes
Power cord length (in)	63 (Full Length)
Drain hose length (in)	78 (Full Length)
Energy Source	electric
Door Hinge	Right (Not Reversible)

Dimensions & Weight

Overall appliance dimensions (HxWxD) (in)	33 1/4 x 23 1/2 x 25
Net weight (lbs)	99
Minimum Stack Height (in)	67




* For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details. Warranties: Limited warranty, entire appliance, parts and labor (1 year); Limited warranty for control board (microprocessor); parts only (1st to 2nd year); Limited warranty for motor or any component of the motor (1st year to 2nd year).


For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904.

Copyright ©2013 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.
13-BOS-0166 SH 5/13

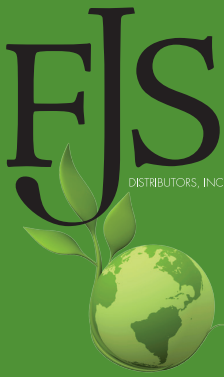

Welcome to a Ventless New World.

(218) 727.1181 • (800) 884.8635 • info@fjsdist.com • www.fjsdist.com

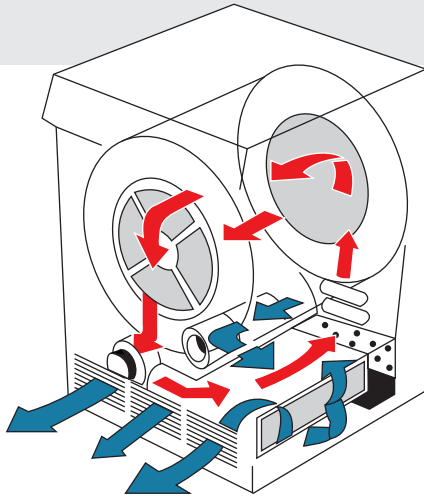

Condensing Tumble (Air) Dryer

The condensing tumble dryer has two air circulation systems: one for the drying air and one for the cooling air. The drying air is indicated by the black arrows, and the cooling air is indicated by the white arrows in the above diagram.


Drying Air (Red Arrows)

- Air is heated by the heater.
- It is then drawn through the drum, where it absorbs moisture from the clothes.
- Air leaves the drum through the lint filter in the door and passes to the fan and on to the condenser.
- The saturated air passes through the condenser, where the moisture condenses out. The water runs down into a container, where it is either pumped up into the main container or flows through the drain hose to a drain.

Cooling Air (Blue Arrows)

The condenser is cooled by air at room temperature, drawn in through the back of the machine and blown through the grills at the front of the machine. If the machine is built in, air is drawn in through the gap between the floor and the underside of the machine.

Bosch WAT28400UC & WTG86400UC Stacked Specs
Dimensions (WxDxH) 24" x 26" x 68" to 70"

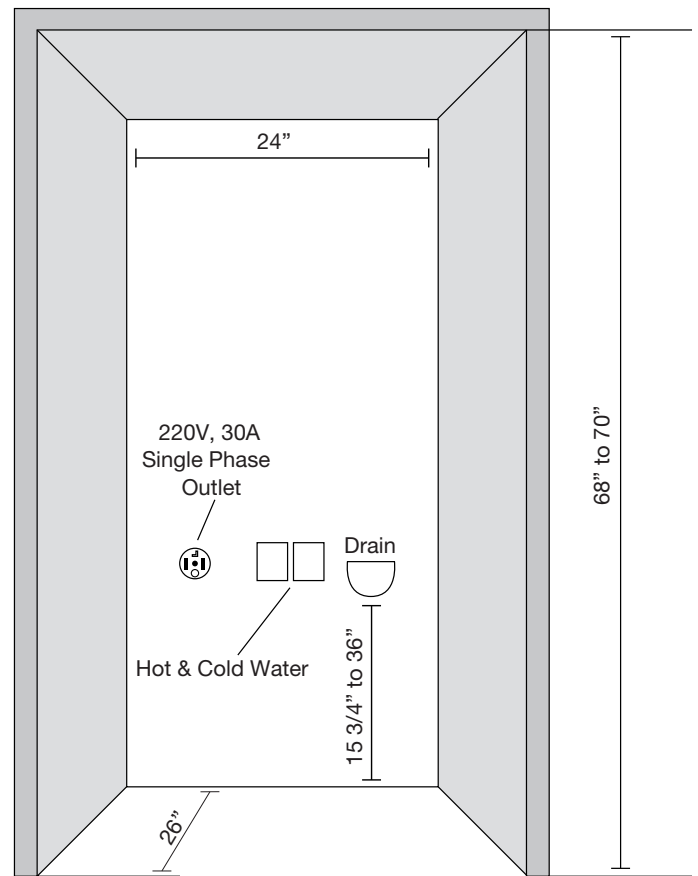

* For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details. Warranties: Limited warranty, entire appliance, parts and labor (1 year); Limited warranty for control board (microprocessor); parts only (1st to 2nd year); Limited warranty for motor or any component of the motor (1st year to 2nd year).

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904.

Copyright ©2013 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

13-BOS-0166 SH 5/13